



- 1) Install ground rod in pull box.
- 2) Maximum 2 conduits per fixture. 3 conduits require adjacent pull box.
- 3) Dissimilar metals separated dielectrically.
- 4) All bolts, nuts, washers, and hardware shall be galvanized steel.

(4) 2-13 LAPPED HOLES AT 90°

VICTORIAN FLUTED POLE (wt. 1200LBS)

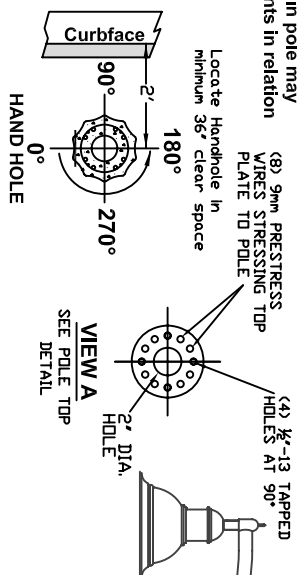

HAND HOLE

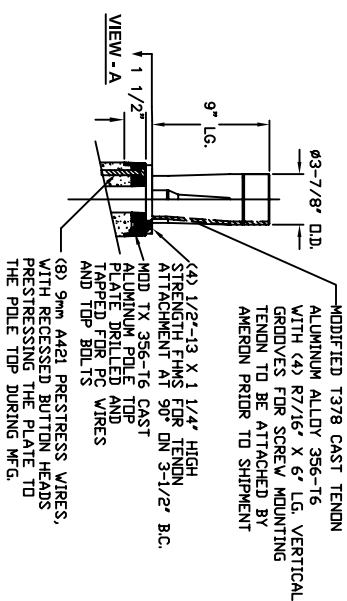


(4) 1/2"-13 X 1 1/4" HIGH STRENGTH FMS FOR TENDON ATTACHMENT
MODIFIED T378 CAST TENDON ALUMINUM ALLOY 356-T6 WITH (4) R7/16 X 6" U.G. VERTICAL GROOVES FOR SORPE MOUNTING TENDON TO BE ATTACHED BY AMERON PRDTR TO SHIPMENT


(8) 9mm AA21 PRESTRESS WIRES, WITH RECESSED BUTTON HEADS PRESTRESSING THE PLATE TO THE POLE TOP DURING MFG.

MOD TX 356-T6 CAST TENDON ALUMINUM POLE TOP PLATE DRILLED AND TAPPED FOR PC WIRES AND TOP BOLTS

MOD 13 356-T6 CAST TENDON ALUMINUM POLE TOP PLATE DRILLED AND TAPPED FOR PC WIRES AND TOP BOLTS

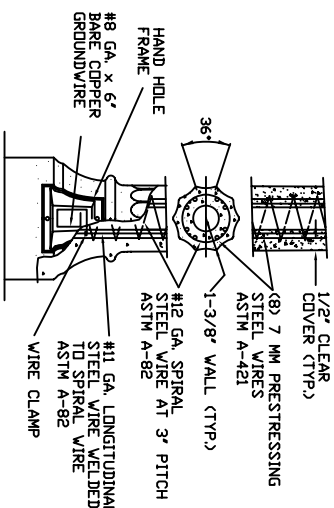

- NOTES:**
- ADJACENT TO CONCRETE**
1. Contact: Pacific Lighting Sales Inc. 2366 Birchier Drive, Suite 100 Lake Forest, CA 92630, (949) 597-1633, <http://www.pls-inc.com>
 2. Order: Pole **VBFX-9.0**, Victorian Fluted Pole, **Pole Mix (2P3S)**, Santa Barbara Black & White exposed aggregate finish, with flat water sealer coating - ASTM C-150 TYPE III gray cement.
 3. Specify Tamper Proof Door Screws.
 4. Baseplate is included
 5. (4) 1"x3/8"x6" galvanized steel bolts & hardware included.
 6. Pole Top designed for max 12'LMA w/2' 1sq.ft. luminaire.

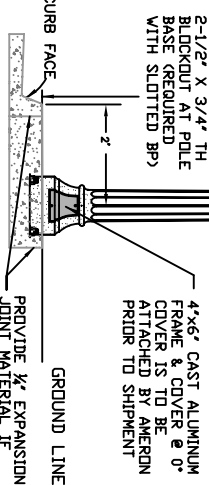

REVISED	DATE	APPROVED	CITY OF SANTA BARBARA – PUBLIC WORKS DEPARTMENT	STANDARD DETAIL
	JAN07			
			POLE STANDARD: TYPE A-08	
			STREET LIGHT POLE	
		PUBLIC WORKS DIRECTOR		3-001.0-08
		DATE		